

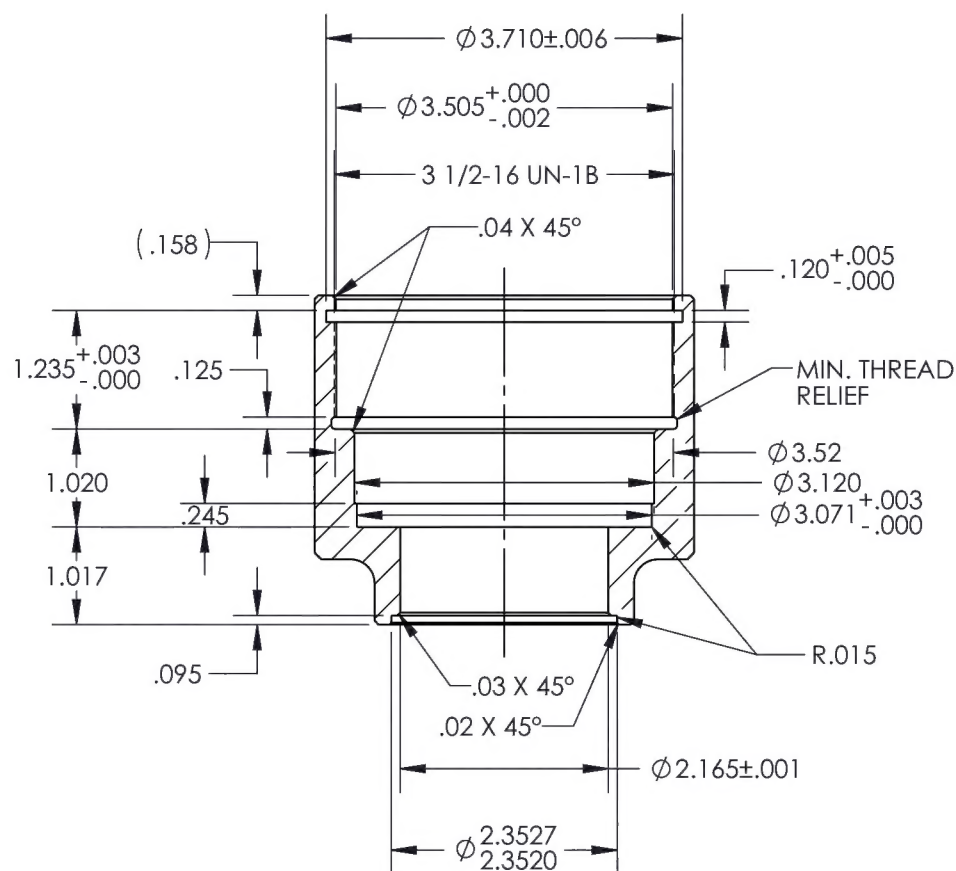


REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2		AS DRAWN BY CANAM	11/12/2012	JAG	
3		CH'D TOLERANCE OF Ø2.352+/.003/-0.000 TO A LIMIT DIM.	11/16/2012	JAG	
4	15-0304	UPDATED TO NEW DRAFTING STANDARDS. ADDED MAT'L OPTION H1075.	10/16/2015	DPD	JAG
5	16-0252	CH'D THREAD DIM WAS 3-1/2 -16 UN -2B IS 3-1/2 -16 UN -1B, ADDED MIN. THREAD RELIEF NOTE.	12/5/2016	RJC	JAG



SECTION A-A

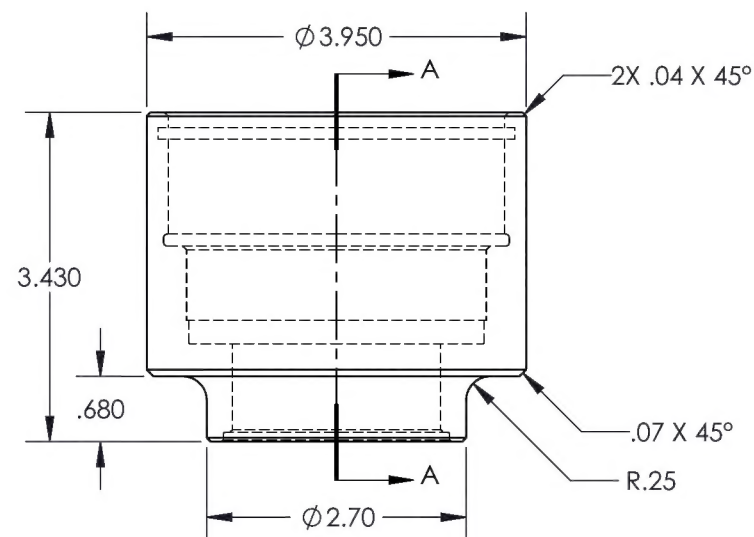

TITLE	
-------	--

## BEARING HOUSING

DWG NO.

SWA10A-300

REV	5
-----	---

MAT'L	SS 17-4 H1150/H1075
-------	---------------------

HEAT	
TREAT	
FINISH	

SPEC

DRAWN BY:

**CHECKED:**

OPPS APPR	
-----------	--

QA APPR:

**APPROVED:**

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES  
 .XXX ± .005 FRACTIONS ± 1/8  
 .XX ± .01 ANGLES ± .5°

.X ± .1 SURFACES = 125

1. BREAK ALL SHARP EDGES  
.015 x 45° OR .015R

2. DIMENSIONAL LIMITS APPLY AFTER PLATING

3. INTERPRET DIM AND TOL PER  
ASME Y14.5M-2009

USED ON MODEL
---------------

--	--

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	UPPS APPR: ANDERSON	ASME Y14.5M-2009	
								QA APPR: LINDSAY	USED ON MODEL	
								APPROVED: GILBERT		
			SWA10A-300	1	BEARING HOUSING	SS 17-4 H1150/H1075		SCALE 1:2	DATE 2/21/2002	SHEET 1 OF 1